


# Large Size Automatic Sewing Machine for Leather Material

GOAAS-L-PQ-1-2800×1600-B-IS-VR2-LH50,AFC-3P380



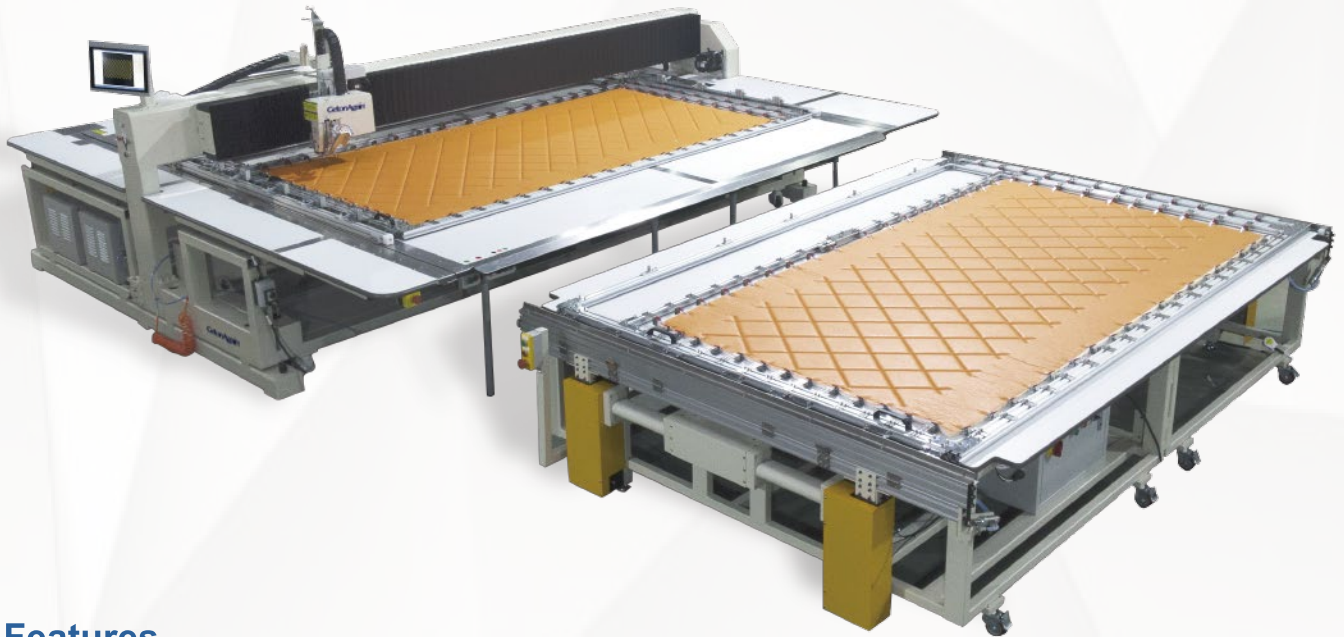


## » Features

- 1、Lifting head, lifting stroke in 50mm, and the sewing thickness is less than 8mm in the compressed state.
- 2、Needle bar and rotary hook main shaft treated with DLC diamond-like coating are wear-resistant and can work normally at high speed without oil or with little oil.
- 3、Split machine frame design, convenient for transportation and entering into the plant.
- 4、5-axis servo + lead screw ensures ultra-large-format sewing accuracy and high-speed sharp corner effect.
- 5、With automatic thread trimming, upper thread breakage detection, bobbin thread counting, and upper thread clamping functions.
- 6、The X and Y directions are driven by ball screws, with higher precision and more accurate positioning.
- 7、The needle and the hook are independently driven to realize automatic hook alignment and automatic position correction.
- 8、Matching with Getonagain AutoSew CAD, simple and easy to learn, to meet customer's personalized pattern customization needs.

## » Application

Suitable for large format leather and fabric upholstery sewing.

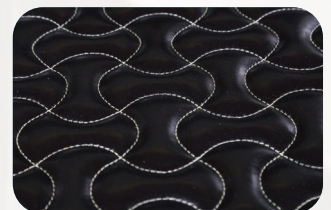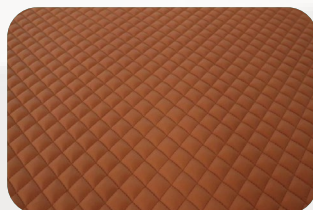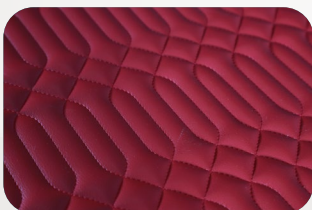

## » Recommended Models

| Models   | Working area  | Machine Size (L×W×H) |
|--|---------------|----------------------|
| GOAAS-L-PQ-1-2200×1600-B-IS-VR2-LH50,AFC-3P380 | 2200mm×1600mm | 3880mm×3580×1700mm   |
| GOAAS-L-PQ-1-2500×1600-B-IS-VR2-LH50,AFC-3P380 | 2500mm×1600mm | 3950mm×3880×1800mm   |
| GOAAS-L-PQ-1-2800×1600-B-IS-VR2-LH50,AFC-3P380 | 2800mm×1600mm | 4305mm×3950×1800mm   |
| GOAAS-L-PQ-1-2500×2600-B-IS-VR2-LH50,AFC-3P380 | 2500mm×2600mm | 5930mm×4000×1800mm   |

## » Parameters

|                           |  |                                |                              |
|---------------------------|--|--------------------------------|------------------------------|
| Stitch Type               | Single Needle Lock Stitch                      | Trimming Type                  | Pneumatic trimming           |
| Max Speed                 | 2500rpm  | Pattern Transmission           | USB                          |
| Max. Leather Sewing Speed | 800-1600rpm<br>(related to material thickness) | Automatic lubrication function | SMC atomization lubrication  |
| Stitch Length             | 0.5-12.7mm                                     | Needle size                    | #9-#23                       |
| Stitches Capacity         | 8G   | Power supply                   | 3 phase 380v                 |
| Clamp Frame Type          | Pneumatic Clamp Frame                          | Power                          | 5.5kW                        |
| Presser Foot Lift Height  | 15mm   | Air Pressure                   | 0.6Mpa, 1.7L/min             |
| Head Lift Stroke          | 50mm   | Frame moving speed (10 levels) | Level 1-10 is 50mm/s-400mm/s |


## » Machine Configuration



15 inch touch screen device



Lifting leather sewing head

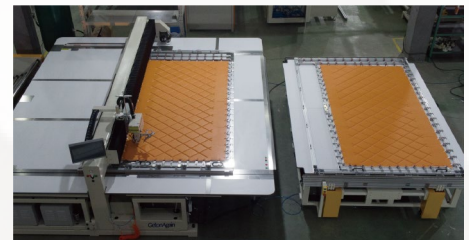

Automatic frame changing table (optional)

20240320

Tianjin Getonagain Technology Co., Limited  
 Address: No.1-108, Haibin Commercial Center, Baodi District,  
 Tianjin, China Tel: +86 22-2252 1236  
 Branch Office: India | Bangladesh | Pakistan | Vietnam | Germany |  
 France | Mexico | Taipei | Hongkong |

[sales@getonagain.com](mailto:sales@getonagain.com)  
[www.getonagain.com](http://www.getonagain.com)



Website



Youtube