


有梭多针电脑绗缝机 (飞梭-N型) Computerized Multi-needle Shuttle Quilting Machine (Flying Shuttle-Model N)



7#, 10# 飞梭
7#, 10# shuttle

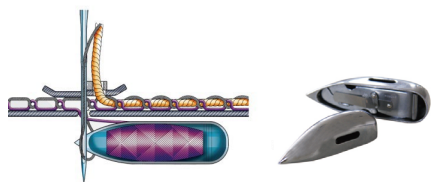

自动送棉装置 (选配)
Automatic fiber feeder (optional)

适用范围

适用于床笠, 床盖, 夏凉被, 绗缝被, 棉服等产品的花型绗缝。

Application

For quilting of fitted sheet, bed covers, summer quilts, quilts and clothing products with quilting pattern.



机器特点

- 电控系统: 15寸液晶显示屏, 简单易懂, 操作快捷, 可实时显示绗缝花样, 形象直观。
- 断线检测功能: 绗缝过程中, 当面线断线时, 机器暂停作业, 同时屏幕显示相关提示, 帮助工人快速分析错误所在。
- 断电保护功能: 如果在绗缝中途电源断开, 再接通电源可使花样在断电前的状态下继续进行作业。
- 统计功能: 自动存储一段时间内的工作信息, 可随时查询已绗缝产量和总产量。
- 可选配专业绗缝制版设计软件, 支持花样任意设计, 宜学宜用。

Features

- Computer Control System: 15-inch LCD screen, easy to understand, quick to operate, can display quilting patterns in real time, image intuitive.
- Thread Breakage Detection: When the upper thread is broken during quilting process, the machine operation is pause, and prompts the related message, to help worker quickly analyse where the problem is.
- Power Down Protection Function: If the power supply is interrupted during quilting, the system will resume operation of quilting pattern from the state it was in before the power down once the power is restored.
- Statistic Count Function: Automatic store the work information in a period of time, and provide the quilted quantity and total production anytime.
- Optional professional quilting pattern design software, freely design quilts pattern is possible, easy to learn and suitable for the application.

机器参数 Parameters

绗缝克重: Quilting Density:	≤600GSM	梭子: Shuttle Hook:	7#/10#	最高绗缝速度: Max. Quilting Speed:	800rpm
步长: Stitch Length:	2mm-7mm	绗缝厚度: Sewing Thickness:	≤25mm	电源: Voltage:	三相 380V 50Hz 3P 380V 50Hz

有梭多针电脑绗缝机（飞梭-N型）



Computerized Multi-needle Shuttle Quilting Machine (Flying Shuttle-Model N)

推荐型号 Model

推荐型号 Model	针排数 Number of Needle Row	针排距 Needle Rows Spacing	X轴移动距离 Travel Distance in X-axis	绗缝宽度 Quilting Width	机器尺寸 Installation Area (L×W×H)	主轴转速 Quilting Speed (r/min)
GOA-QC-NM-LS2-64+64-203.2× 1600.2-1"RNS-SS7R-NA-3P380	2	76.2mm	203.2mm	1600mm	3850×1320×1800mm	600-800
GOA-QC-NM-LS3-64+64+64-203.2× 1600.2-1"RNS-SS10R-NA-3P380	3	76.2mm, 76.2mm, 152.4mm	203.2mm	1600mm	3850×1320×1800mm	600-800
GOA-QC-NM-LS2-94+94-305× 2362.2-1"RNS-SS10R-NA-3P380	2	76.2mm	305mm	2450mm	4650×1320×1800mm	550-750
GOA-QC-NM-LS3-94+94+94-305× 2362.2-1"RNS-SS10R-NA-3P380	3	76.2mm, 76.2mm, 152.4mm	305mm	2450mm	4650×1320×1800mm	550-750
GOA-QC-NM-LS3-128+128+128-305× 3225.8-1"RNS-SS10R-NA-3P380	3	76.2mm, 76.2mm, 152.4mm	305mm	3300mm	5550×1320×1830mm	450-650

设备连线应用 Device Connection Application


单位/Unit: mm

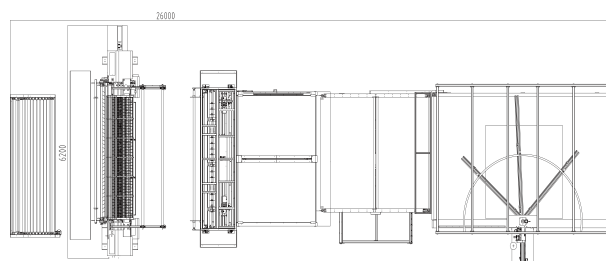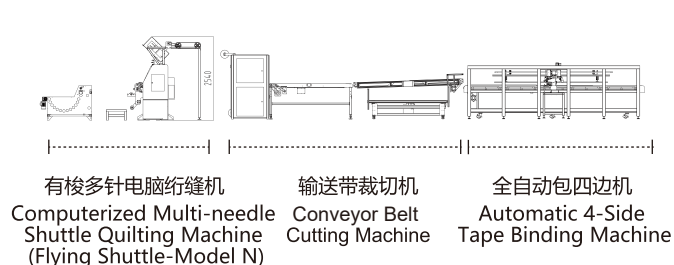

机器选配 Optional Configuration



输送带裁切机
Conveyor Belt Cutting Machine

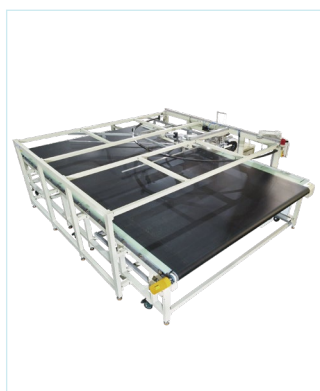

全自动包四边机
Automatic 4-Side Tape Binding
Machine



收料架
Material Collecting Rack



全自动飞梭绕线机
Automatic Shuttle Winding
Machine

天津再登高科技股份有限公司

地址：天津宝坻经济开发区天宝南环路8号4层

邮箱：sales@getonagain.com

网址：www.GetonAgain.com

400-166-8581

Tianjin GetonAgain Co., Ltd.

Address: 4/F. No. 8, Nan Huan Road, Economic Development Zone,
Baodi, Tianjin, China.

Email: sales@getonagain.com

www.GetonAgain.com