



L2000 High-speed Multi-needle Quilting Machine

L2000高速多针绗缝机



Features

- Double-row lock-stitch multi-needle quilter, with large rotary hook, max. speed of 2000 rpm, more than 3 times of normal shuttle quilting machine, greatly improves work efficiency.
- Triple capacity rotary hook, less bobbin changing frequency; beautiful stitches, no lost stitch, no thread loops.
- Touch screen operation, graphical interface, clear and intuitive, all functions can be seen on the same interface.
- Full servo motor driving system, precise control and strong power.
- The needle row distance can be adjusted arbitrarily from 3-9 inches to achieve extra-large pattern quilting. The lower needle row can move 3 inches (half the needle distance) in the X direction to match the upper needle. Various patterns needle calculation can be done without changing the needle position, thereby greatly improved production efficiency.
- Bobbin change in standing position, easy and fast, reduce labor intensity.
- Special surface-treated sewing heads and rotary hook parts, micro-oil lubricating system, more durable.

机器特性

- 大旋梭多针绗缝机，工作速度高达2000转/分，是普通飞梭绗缝机速度的3倍多，大大提高了工作效率。
- 专用3倍大旋梭，底线容量更大，减少更换频率；线迹美观，无丢针、不起环。
- 触摸屏操作，图形化界面，清晰直观，所有功能可视于同一界面。
- 全伺服电机驱动，控制精准，动力强劲。
- 针排距可从76mm-228mm任意调节，实现特大花样绗缝，下排针X向最多可移动76.2mm (针距的一半)，配合上针可完成各种花型的绗缝排针，无需改变针位，从而大大提高生产效率。
- 立姿换梭，轻松快捷、改善工人劳动强度。
- 机头和旋梭零件特殊表面处理、微油润滑、经久耐用。

Parameters 机器参数

Quilting Density 绗缝克重	≤ 1000gsm	Sewing Thickness 绗缝厚度	≤ 50mm
Stitch Length 步长	2mm-6mm	Rotary Hook 旋梭	3 Triple size large rotary hook 3倍大旋梭
Working Speed 工作速度	≤ 2000rpm	Voltage 电源	380V 50Hz

Parameters 机器参数

Head Distance 头距	Models 推荐型号	Needle Row 针排	Sewing Width 绗缝宽度	X Stroke X方向行程	Machine Size (L×W×H) 机器尺寸 (长×宽×高)
GOA-NM-L2000S-24-420×2415-105S50-VR3-NA-3P380	105	Single Row 单排	2835mm	420mm	6080mm×1400mm×2384mm
GOA-NM-L2000S-26-420×2625-105S50-VR3-NA-3P380	105	Single Row 单排	3045mm	420mm	6080mm×1400mm×2384mm
GOA-NM-L2000S-27-420×2730-105S50-VR3-NA-3P380	105	Single Row 单排	3150mm	420mm	6080mm×1400mm×2384mm
GOA-NM-L2000D-24+23-315×2415-105S50-VR3-NA-3P380	105	Double Row 双排	2730mm	315mm	5095mm×1200mm×2260mm
GOA-NM-L2000D-26+25-315×2625-105S50-VR3-NA-3P380	105	Double Row 双排	2940mm	315mm	5095mm×1200mm×2260mm
GOA-NM-L2000D-29+28-315×2940-105S50-VR3-NA-3P380	105	Double Row 双排	3255mm	315mm	5410mm×1200mm×2260mm
GOA-NM-L2000D-32+31-315×3255-105S50-VR3-NA-3P380	105	Double Row 双排	3570mm	315mm	5725mm×1200mm×2260mm
GOA-NM-L2000D-14+13-304.8×1981-152.4S50-VR3-NA-3P380	152.4	Double Row 双排	2286mm	304.8mm	5095mm×1200mm×2260mm
GOA-NM-L2000D-17+16-304.8×2438-152.4S50-VR3-NA-3P380	152.4	Double Row 双排	2743mm	304.8mm	5095mm×1200mm×2260mm

Machine Configuration 主要配置




Rechpeace brand-new model III computer control system, friendly HMI, flexible touch control, large storage capacity, ensure high precision operation of complete machine.
富怡自主研发全新III型电脑控制系统，友好的人机界面，触控灵活，存储量大，确保整机的高精度运行。



Double-row quilter: the lower quilting head row could be moved horizontally as a whole, up to half of the head to head distance, making the pattern design more diversified.
双排机型：下排机头可整体横移，最多至半个头距，令花型设计更为多种多样。



Atomized oil lubrication system: automatic, precise, pollution-free, can directly lubricate the parts inside of upper heads cover or rotary hook guide rail of lower heads, automatically spraying oil mist by set parameters.
雾化喷油系统：自动、精准、无污，可直接润滑至上机头壳体内部零件及下机头旋梭导轨，根据设定参数自动喷油雾。

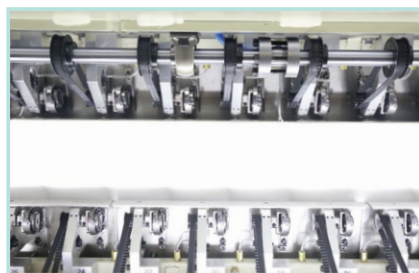

Original Italy Cerliani triple large size rotary hook, with special surface treatment, micro-oil lubrication.
原装意大利进口3倍大旋梭，特殊表面处理，微油润滑。



The integrated follow-up fabric feeding rack reduces fabric tidying process and labor intensity.
一体随动式上料架，减少面料整理工序，降低人工强度。



Adjustable presser foot mechanism, suitable for quilting different thickness of materials.
可调压脚机构，适合不同厚度的材料绗缝。

Tianjin Getonagain Technology Co.,Ltd

Address: No.1-108, Haibin Commercial Center, Zhaoxia Street, Baodi District, Tianjin, China Tel: +86 22-2252 6200
Email: sales@getonagain.com www.getonagain.com
Branch Office: India | Bangladesh | Pakistan | Vietnam | Germany | France | Mexico |

天津市再登科技有限公司

地址：天津市宝坻区朝霞街道海滨商贸中心1-108 400-166-8581

东莞分公司：东莞市厚街镇莞太路桥头路段西412号
山西分公司：山西转型综合改革示范区学府产业园长治路227号高新国际A座1101室
再登科技（香港）有限公司：香港九龍新蒲崗大有街1號勤達中心20樓1-5室
中国台湾办事处：臺灣新北市三重區重新路5段609巷20號5樓之4