



官方网站
website



Youtube



官方微信
WeChat

Ultra High-speed Computerized Chain Stitch Multi-needle Quilting Machine

Features

- The unique oil lubrication design system greatly improves the working life of the machine and reduces the daily maintenance frequency.
- The wear-resistant parts made of special metal material makes machine work more smoother and lower noise.
- Aluminum alloy bar and press plate are controlled by a double-swinging device without cam avoiding lubrication and dirtying of material.
- The unique 12.7mm needle distance design and the addition of a slitting structure with a cutter can produce the mattress border strips.
- Automatic thread trimming function for jump and tacking pattern.
- Advanced computer control operating system, easy to operate.
- Main shaft is driven by servo motor, powerful working system.
- Infrared safety protection, auto-thread break detection function.

超高速电脑无梭多针绗缝机

机器特性


- 独特的供油润滑设计系统，大大提高了整机工作寿命，减少日常保养频次。
- 采用特殊金属材料防磨，机器工作更加平稳、低噪音。
- 铝合金针杆架、压杆架结构，免加油，坚固耐用。
- 特有的12.7mm针距设计和加装切刀分条结构，可生产床垫围边。
- 自动剪线功能，任意跳花。
- 先进绗缝电脑控制系统，操作简单易学。
- 主轴驱动采用伺服电机，功能强大
- 红外安全防护，红外底线、面线断线自停检测

Application

Mattress panel, mattress pads, bedspreads, comforters, bedding, blankets, seats covers, decoration, and more.

适用范围

用于生产高级床垫面料、居家装饰品、地毯、坐垫等。

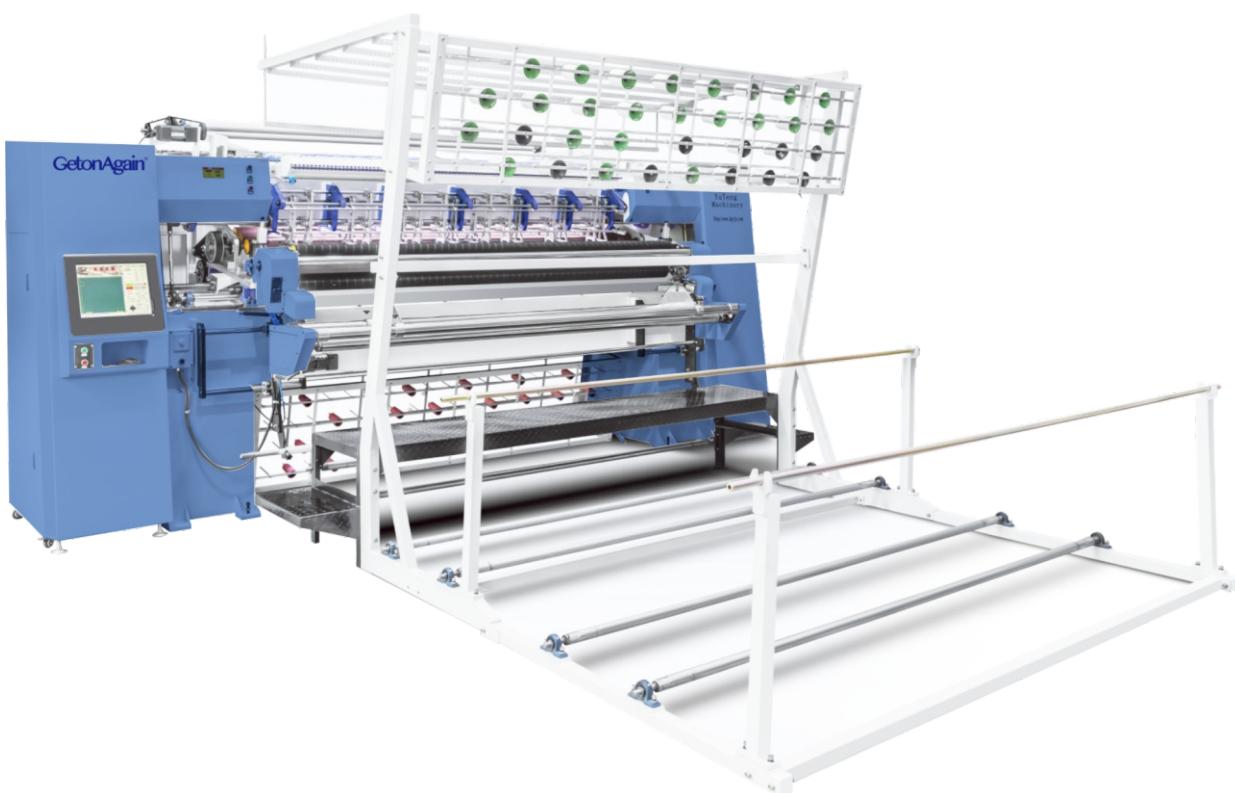

Parameters 机器参数

Model 型号	GOAQC-NM-6"C3BSJ-128+128+128-410×2362-0.5"RNC-CN-SF-3P380
Dimension (L ×W×H) 主机尺寸 (长×宽×高)	5200×1600×2300mm
Quilting width 绗缝宽度	2450mm
The number of needle rows 针排数	3
Space between needle rows 针排距	3"+2"/3"+3"
Space between needle 针距	25.4mm / 12.7mm
X-axis travel X行程	305mm (Customizable/可定制)
Stitch length 步长	1-12mm
Production speed (m/hour) 生产速度 (米/时)	110- 330 (m/hour)
Needle model 机针型号	21#, 22#, 23#, 24#
Quilting speed (r/min) 主轴转速 (转/分钟)	100-1400 (r/min)
Voltage (AC) 电压 (AC)	3P 380V / AC 220V
Total power 功率	8kW
Gross weight 全机重量	5500kg
Average gas consumption 平时耗气量	15.5 (L/min)
total gas consumption 总耗气量	78 (L/hour)

Customized model are available to meet client's various needs / 可按客户需求订做特殊机型



Unique oil bag oil supply system
独特的油囊供油系统



Aluminum alloy needle and
pressure rod holder
铝合金针、压杆架



Edge tape cutting structure
边条分切结构

Tianjin Getonagain Technology Co.,Ltd

Address: No.1-108, Haibin Commercial Center, Zhaoxia Street, Baodi District, Tianjin, China Tel: +86 22-2252 6200
Email: sales@getonagain.com www.getonagain.com
Branch Office: India | Bangladesh | Pakistan | Vietnam | Germany | France | Mexico |

天津市再登科技有限公司

地址: 天津市宝坻区朝霞街道海滨商贸中心1-108 400-166-8581
东莞分公司: 东莞市厚街镇莞太路桥头路段西412号
山西分公司: 山西转型综合改革示范区学府产业园长治路227号高新国际A座1101室
再登科技(香港)有限公司: 香港九龍新蒲崗大有街1號勤達中心20樓1-5室
中国台湾办事处: 臺灣新北市三重區重新路5段609巷20號5樓之4